



Instant Pop Up Canopy Side Wall Instructions

1



After you have attached the cover to your instant canopy frame and it is locked in the fully extended position your side walls can be attached.

2



Before raising the canopy to an extended height fold up the two adjacent corners of the cover to reveal the inside perimeter Velcro strip.

3




Holding the sidewall, fold of the top edge of the wall so that the Velcro will match up with the Velcro strip sewn to the cover. Attach the Velcro strip along the top edge of the cover aligning the zipper to the outside corner of the leg. Repeat this process until all walls are attached.

4



Next secure the Velcro strips around each corresponding leg and zipper the two walls together. On the DuraLite unit - the walls do not zipper at the corners, the zippers are centered in the 4 openings and attach to the legs with the straps sewn on the inside of the side walls.

5

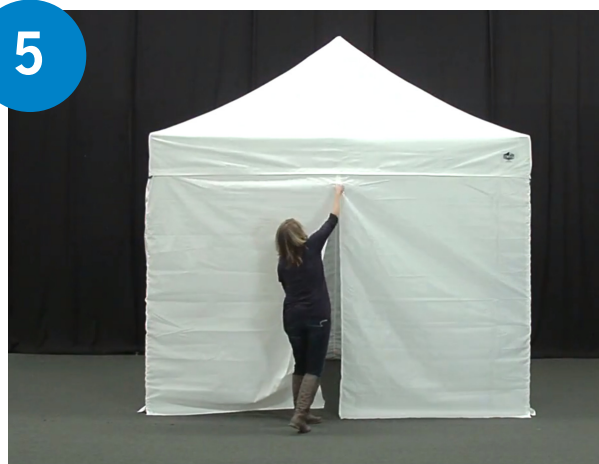

Your side wall kit comes equipped with zippered walls for easy entry and exit.

6



The side walls can be fully opened by velcroing them back and fastening them around the legs with the straps sewn into the walls.